

# KIDS' PLAYROOM BUILD

Corner Loft · Rope Bridge · Ranger's Outpost Playhouse

CONSTRUCTION DOCUMENT SET · dimensional lumber + stock hardware only · generated from the parametric Blender model

ROOM 13'-6" x 13'-5" · CEILING 8'-0" · PLATFORM 3'-8" · GUARD 3'-0"

## READ FIRST — THREE SPECS IN THE BRIEF ARE NOT BUILDABLE AS WRITTEN

### 1. A 36-38" hobbit door will not fit under a 44" platform

BRIEF SAID

R.O. 24-26" W x 36-38" H

THIS SET USES

R.O. 26" W x 32" H

44" deck - 3/4" plywood - 5-1/2" joist = 37-3/4" of wall, floor to underside of framing.  
Take out the 1-1/2" bottom plate, a 1-1/2" flat header, a 2-3/4" cripple and a 1-1/2" top plate and 32" is what is left.  
A 32" door is still right for a 3-6 year old. The semicircular arch on top reads taller than it measures.

### 2. The knee wall studs are 34-3/4", not 40-42"

BRIEF SAID

studs ~40-42" tall

THIS SET USES

studs 34-3/4"

Same arithmetic. The wall dies into the underside of the joists at 37-3/4", and two plates eat 3" of that.  
Cut one, hold it in place, and confirm before you cut the other fifteen.

### 3. The bridge span is 54", not 42"

BRIEF SAID

span ~42"

THIS SET USES

clear span 54"

162" wall - 60" loft - 48" playhouse = 54" of clear air between them.  
Both structures are in corners, so neither can slide toward the other to close the gap.  
Order the net for 54". Expect 6-8" of sag at that span, which is why the plan set carries a top rope AND a mid rope.

## SHEET INDEX

|    |                                                             |
|----|-------------------------------------------------------------|
| A0 | Cover · critical notes · sheet index                        |
| A1 | Overall room plan · structure locations · wall anchor zones |
| A2 | Loft — deck framing plan · hexagon geometry · joist layout  |
| A3 | Loft — developed elevation of all four open faces           |
| A4 | Loft — knee wall framing · hobbit door · arch template      |
| A5 | Ladder detail · bookshelf guard detail                      |

|    |                                                      |
|----|------------------------------------------------------|
| A6 | Playhouse — plan · elevations · roof framing         |
| A7 | Rope bridge — elevation · anchor details · load path |

|     |                                         |
|-----|-----------------------------------------|
| A8  | Cut list (by structure, by stock)       |
| A9  | Hardware schedule · Home Depot buy list |
| A10 | Photograph of assembly                  |


## AT A GLANCE

|                       |                                                            |
|-----------------------|------------------------------------------------------------|
| Loft deck area        | 21.75 sq ft (60" x 60" envelope, hexagonal)                |
| Loft deck shape       | 6-sided · angles 90/90/157.5/135/157.5/90                  |
| Miter angles required | 11-1/4 deg and 22-1/2 deg — both saw detents               |
| Posts                 | 6 at the loft (5 tall + 1 corner stub), 4 at the playhouse |
| Bridge clear span     | 4'-6" · net 1'-6" wide                                     |
| Guard height          | 3'-0" above deck (top of the 32-36" range)                 |
| Total 4x4 PT          | ~65 lf    Total 2x4: ~127 lf    2x6: ~46 lf                |
| Plywood               | 3 sheets 3/4" (2 structural, 1 skin/doors)                 |
| Est. material cost    | \$1,250 - \$1,350 · see sheet A9                           |

# OVERALL ROOM PLAN

structure locations · wall anchor zones · stud layout

A1

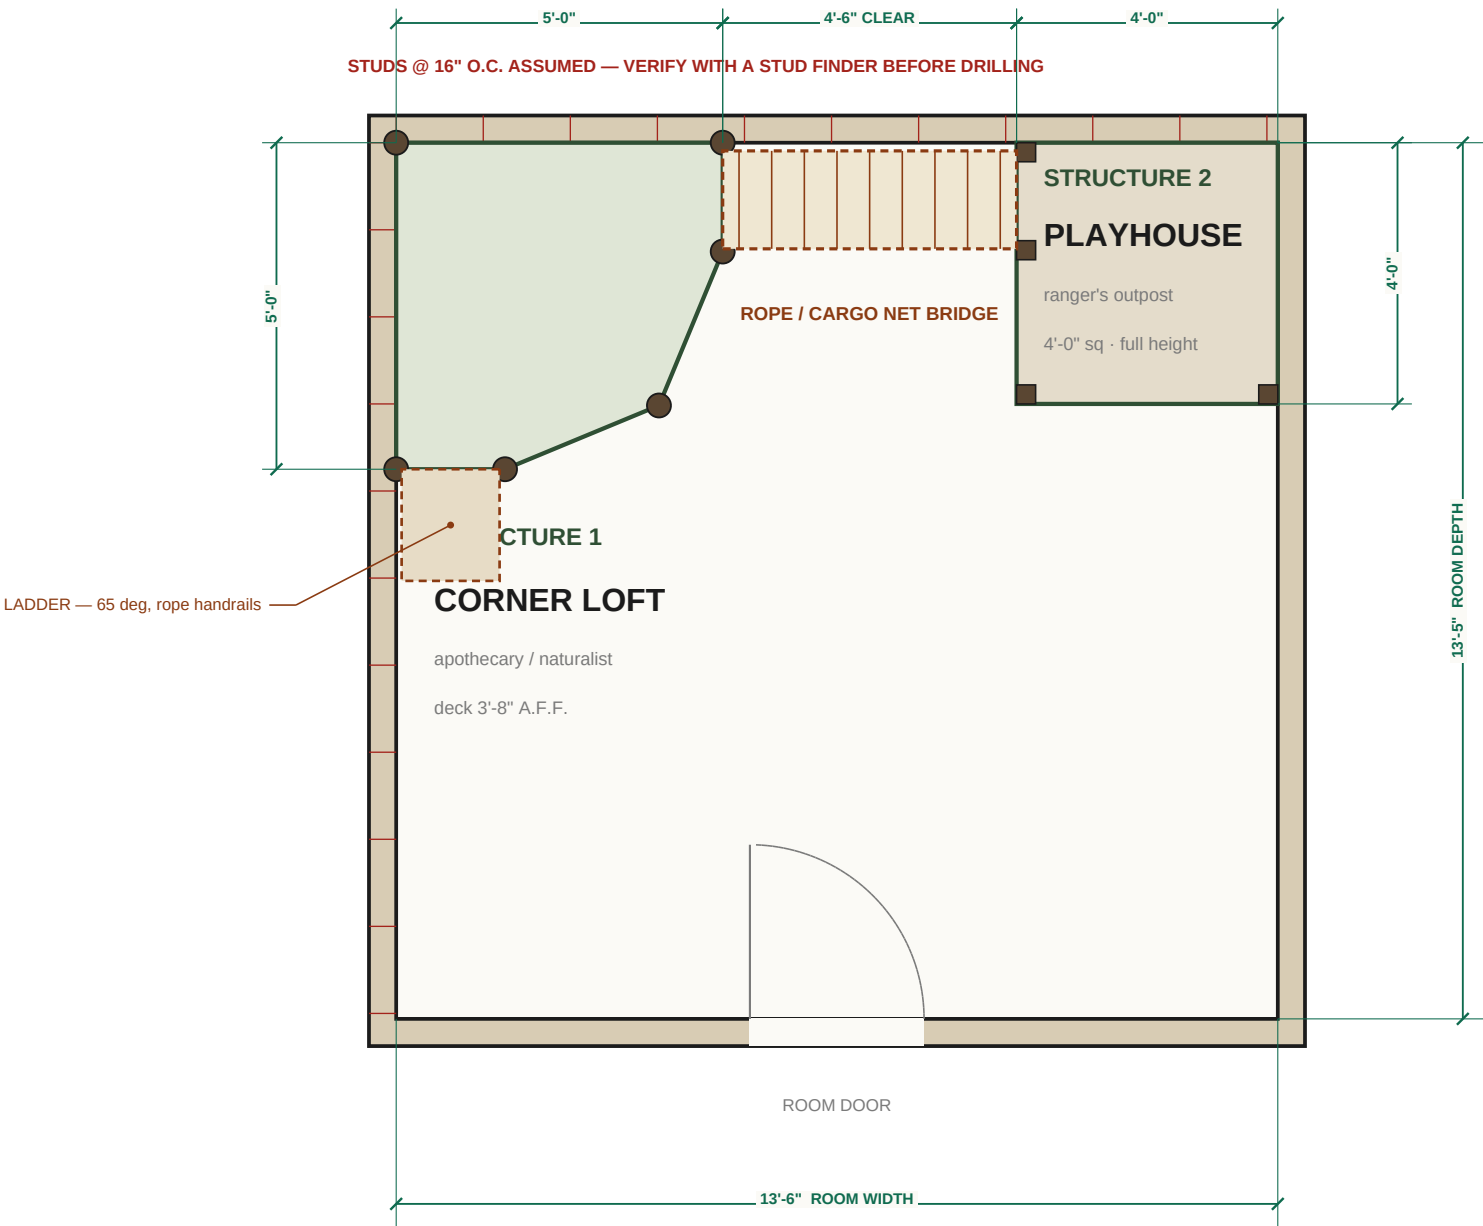

## LOAD PATH

The wall ledgers carry the real load.  
Posts are secondary / aesthetic.

LOFT: two 2x6 PT ledgers, one on the north wall and one on the west wall, 3/8" x 4" lag + washer into EVERY stud.

PLAYHOUSE: north and east posts lag-bolted directly to wall studs.

BRIDGE: both ends through-bolted into 2x6 ledgers that are themselves lagged into a minimum of 2 studs.  
Eye BOLTS with washer + nylock nut.  
**Never screw eyes.**


### VERIFY STUD SPACING ON SITE.

16" O.C. is assumed throughout; if your studs are 24" O.C. or irregular, shift ledger bolt locations to land on wood and add a bolt — do not rely on drywall anchors anywhere in this set.

# LOFT — DECK FRAMING PLAN

hexagon geometry · joist layout · post schedule

A2

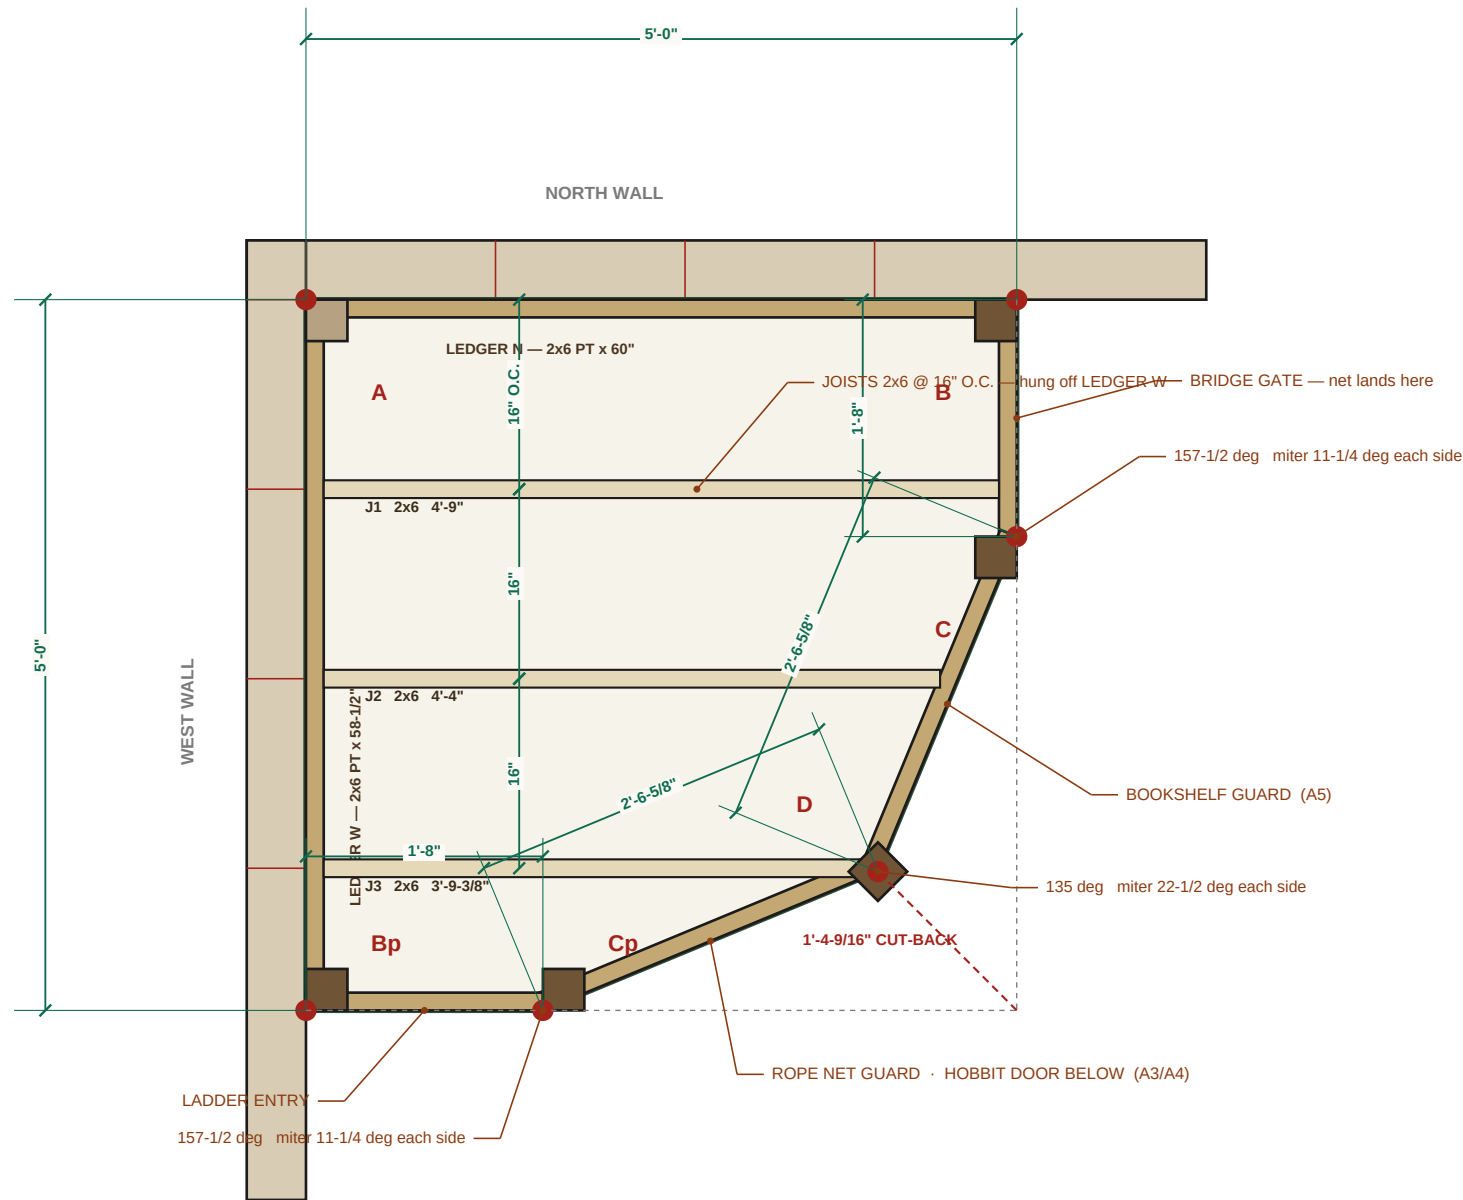

## HEXAGON GEOMETRY — RESOLVED

| VERTEX | u (in) | v (in) | POST CUT      |
|--------|--------|--------|---------------|
| A      | 0.000  | 0.000  | 4x4 x 37-3/4" |
| B      | 60.000 | 0.000  | 4x4 x 80"     |
| C      | 60.000 | 20.000 | 4x4 x 80"     |
| D      | 48.284 | 48.284 | 4x4 x 80"     |
| Cp     | 20.000 | 60.000 | 4x4 x 80"     |
| Bp     | 0.000  | 60.000 | 4x4 x 80"     |

### WHY THIS SHAPE

A 45-degree chamfer of one corner gives a PENTAGON, not a hexagon — the two cut edges come out collinear, so the middle vertex is not a corner at all.

A true 6-sided deck inside a 60 x 60 corner needs two 22-1/2 degree joints flanking one 45 degree joint. Interior angles: 90 / 90 / 157-1/2 / 135 / 157-1/2 / 90. They sum to 720, as a hexagon must.

Every miter is therefore 11-1/4 or 22-1/2 degrees. Both are detents on any 10-inch miter saw. Nothing in this deck needs a custom angle or a bevel gauge.

### DECK AREA 21.75 SQ FT

Both 60-inch wall runs stay full length, so both ledgers get maximum stud engagement. That is the whole point of cutting the outer corner instead of the wall corners.

### JOIST NOTES


J1 is square both ends — Simpson LUS26 hangers. J2 and J3 die into an angled rim. Use Simpson LSU26 adjustable skewable U hangers (Internet # 100375129), field-bent to the angle shown. Alternatively bevel the joist end and add a 2x6 cleat underneath. Do not toe-nail either one.

POST D sits at 45 degrees so its faces meet both angled rims squarely. Cut its notches before standing.


# LOFT — DEVELOPED ELEVATION

all four open faces unrolled flat

A3

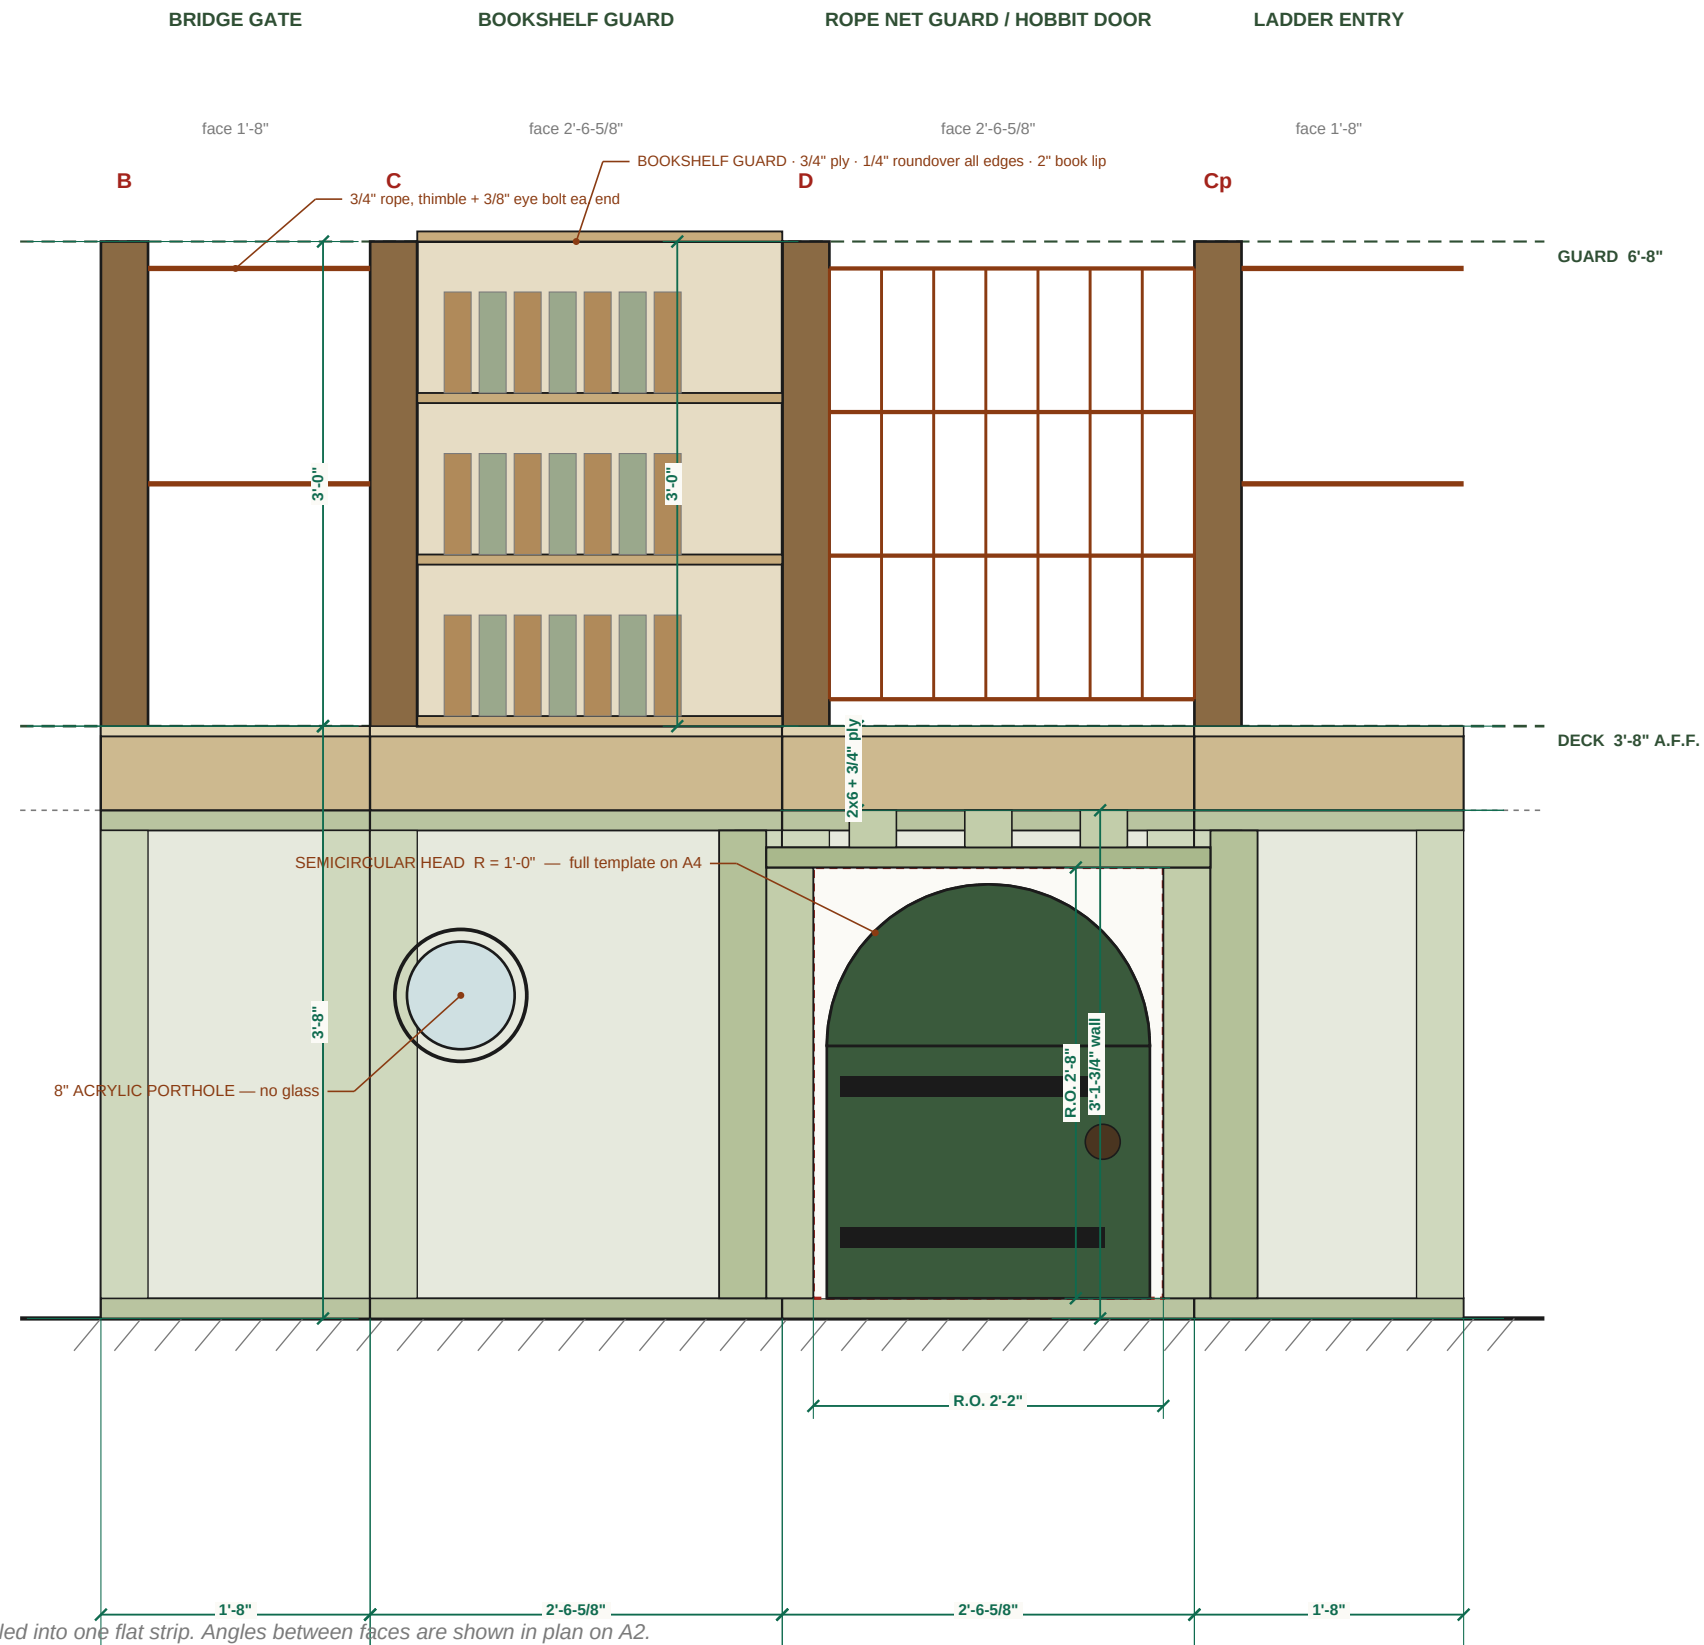


KNEE WALL SECTION — typical

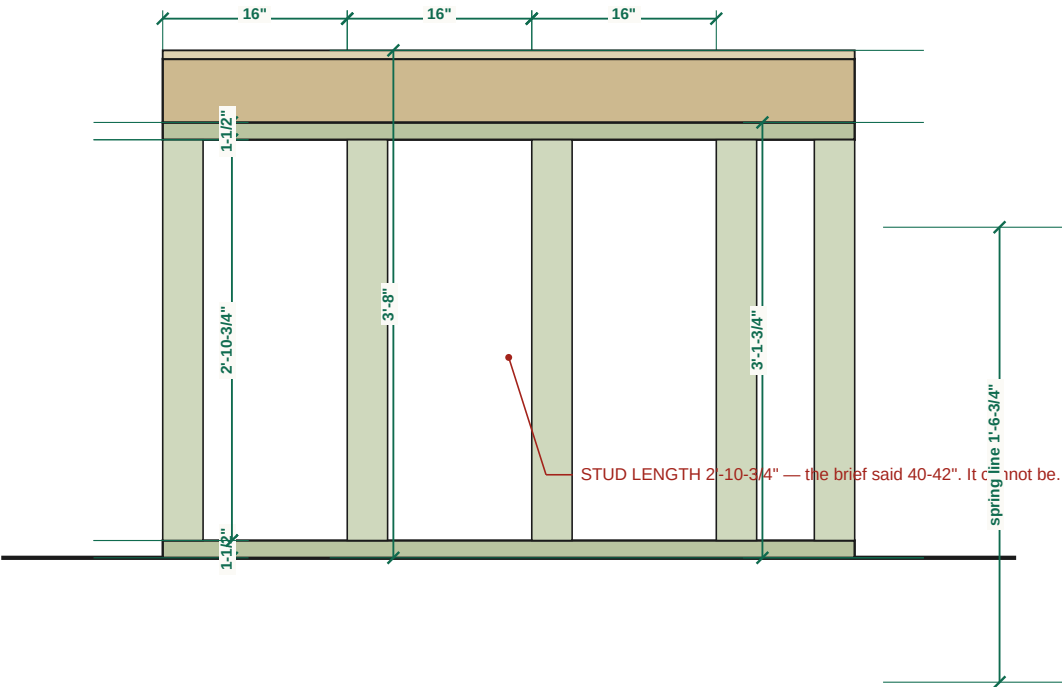

HOBBIT DOOR — FULL TEMPLATE


2" grid — scale off the grid, not the paper

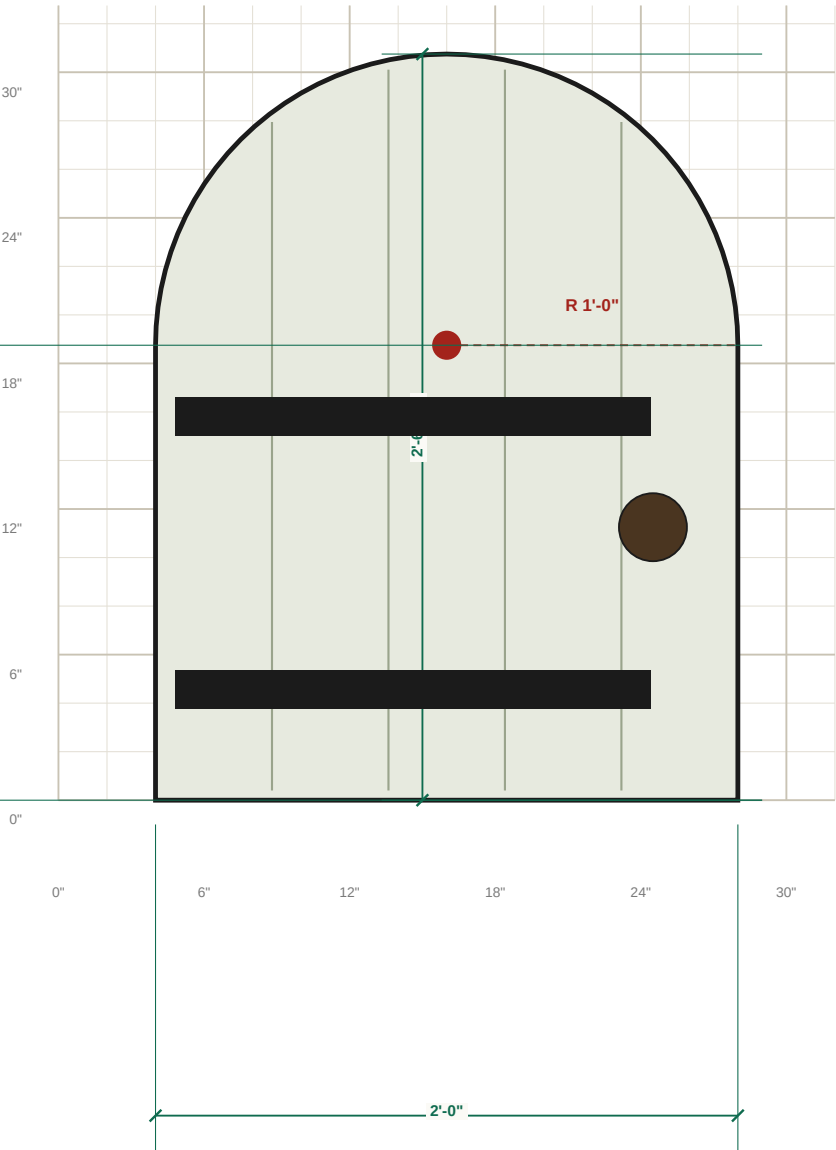


DOOR BUILD-UP

- Slab: two layers of 3/4" ply, glued and screwed, grain crossed, cut to the template above = 1-1/2" thick.
- Face with 1x4 tongue-and-groove pine, vertical, ripped to the arch with a jigsaw.
- Hinges: 12" black strap hinges, 2 per door, through-bolted with 1/4" carriage bolts — screws alone will sag.
- Jamb: 3/4" ply, 3 sides, glued and screwed into the king/jack studs. No sill — remove the bottom plate inside the R.O. after the wall is standing.
- Knob: 2-3/4" round wood knob, 1/4" lag from the back.
- Magnetic catch, not a latch. A kid must be able to push the door open from the inside with no hardware.
- NO lock of any kind, inside or out.
- Paint: deep green (see A9). Two coats, sand between.

LADDER ELEVATION

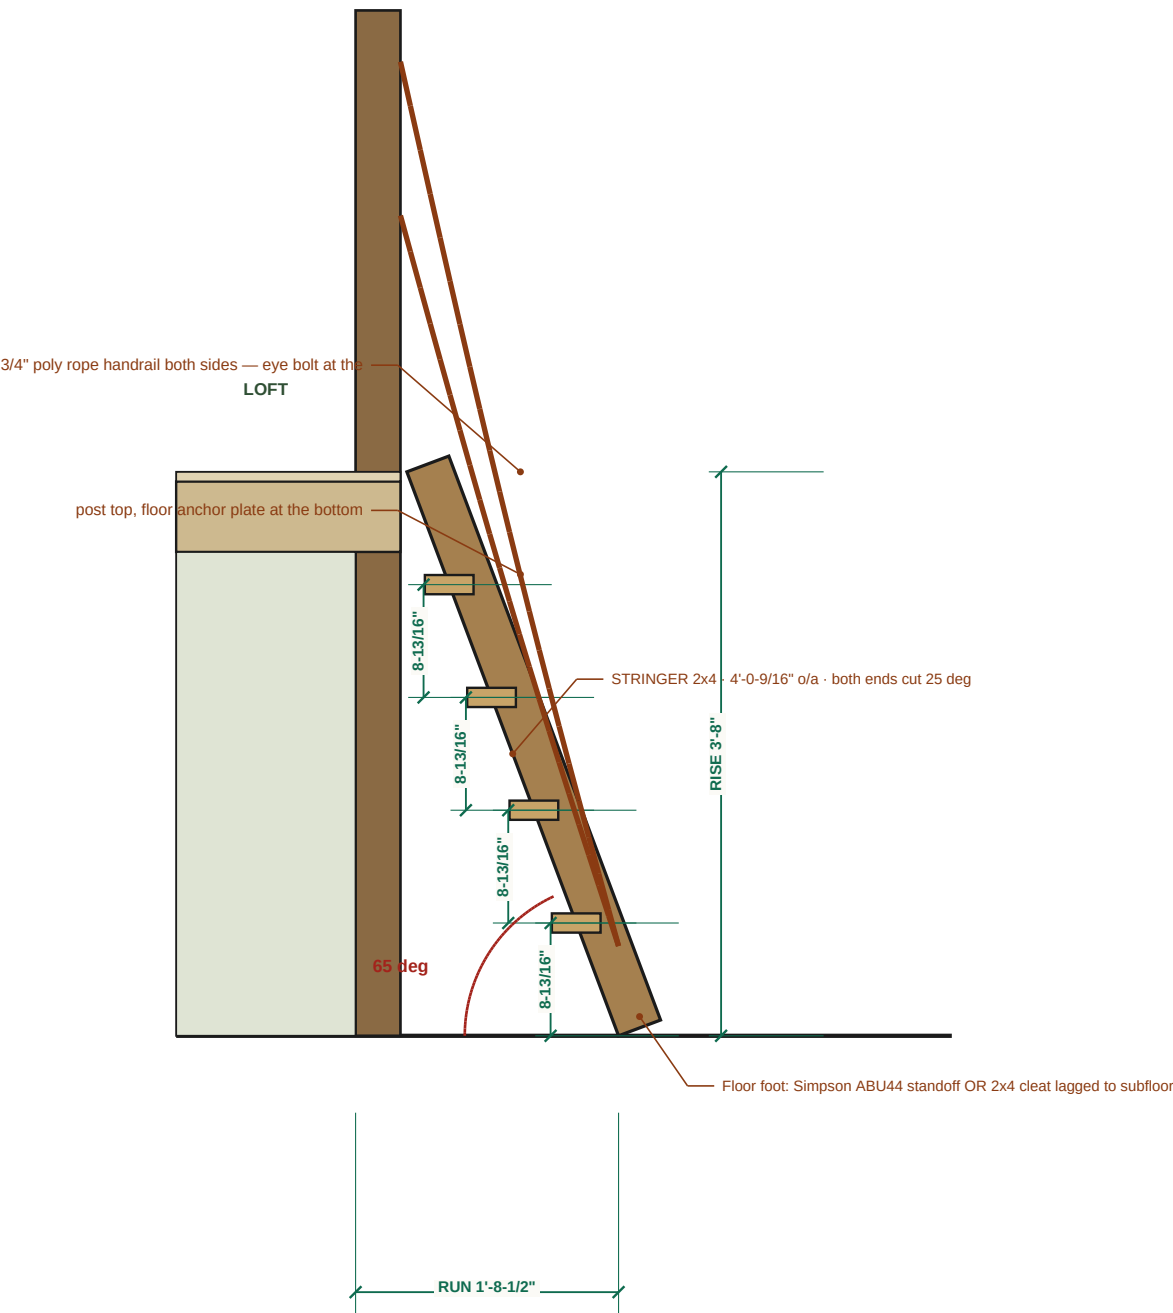


LADDER PLAN

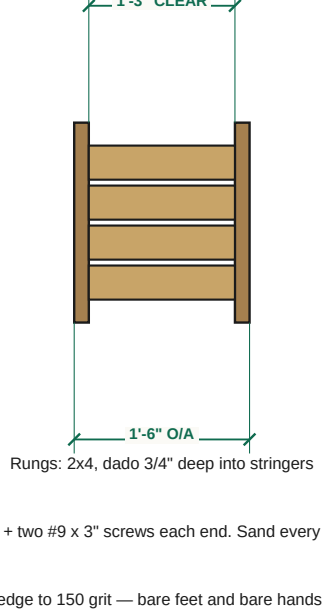

BOOKSHELF GUARD — ELEVATION

fits between posts C and D · 7-1/4" deep

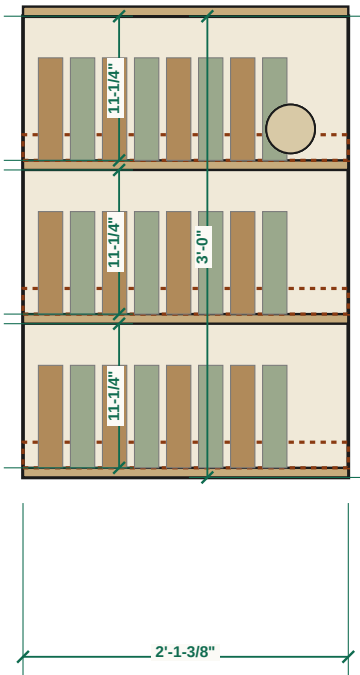

**THIS SECTION IS A GUARDRAIL FIRST, A SHELF SECOND.**


- Carcass: 3/4" ply, dadoed shelves, glued + screwed.
- Lag the two ends to posts C and D with 4x 1/4" x 3" lag screws each — 2 top, 2 bottom. It must not rack.
- 1/4" roundover on every exposed edge, then sand 150.
- 2" book lip on the deck side of every shelf.
- Apothecary jars: HDPE or PET only. No glass, no mason jars. Dried botanicals, acorns, pinecones.
- Hot-glue or silicone the jar bases to the shelf.
- Nothing heavier than 2 lb above 24" off the deck.

# PLAYHOUSE


plan · south elevation · roof framing

A6


PLAYHOUSE PLAN

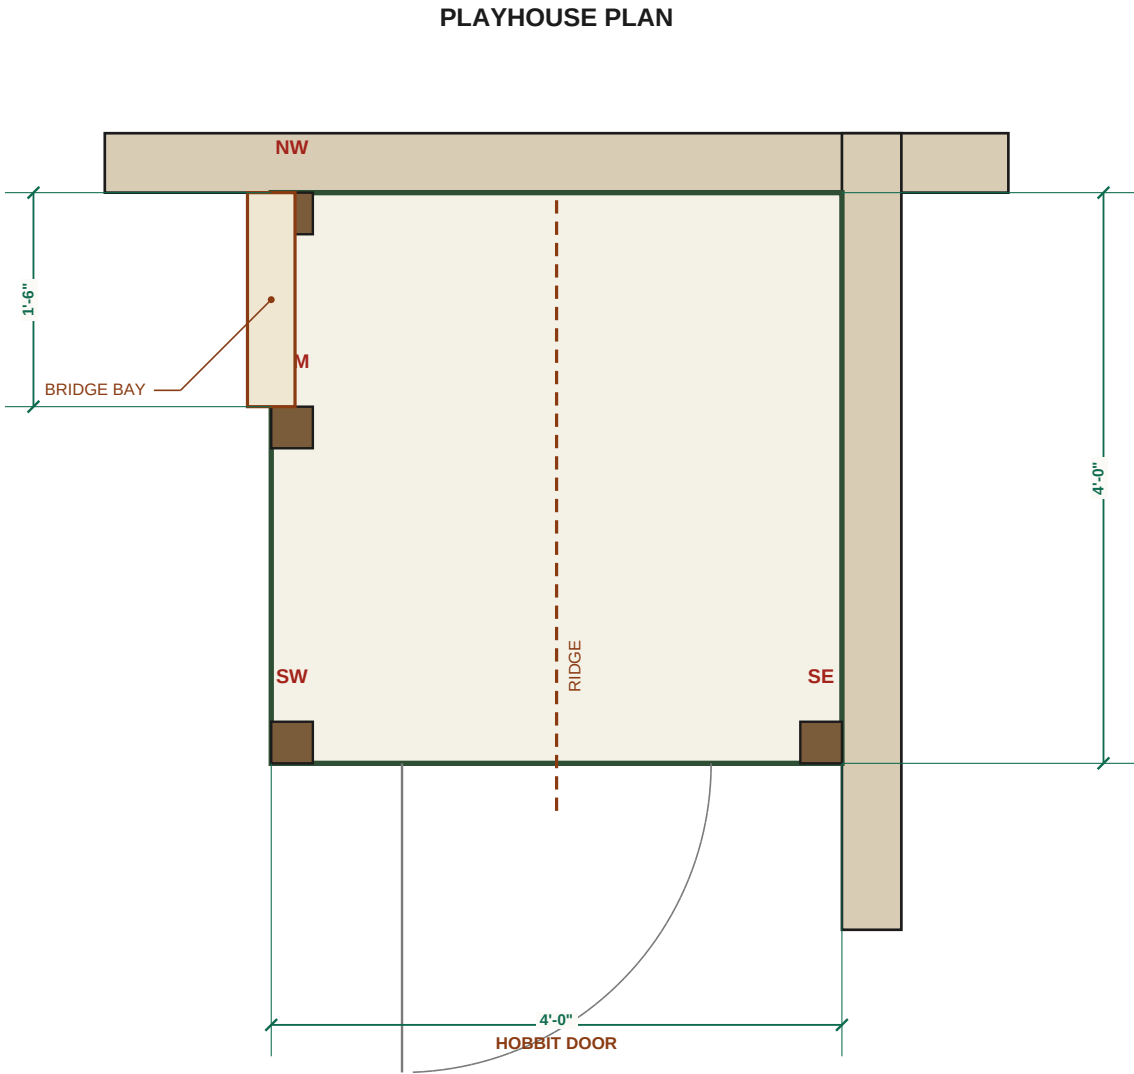

SOUTH ELEVATION (faces the room)

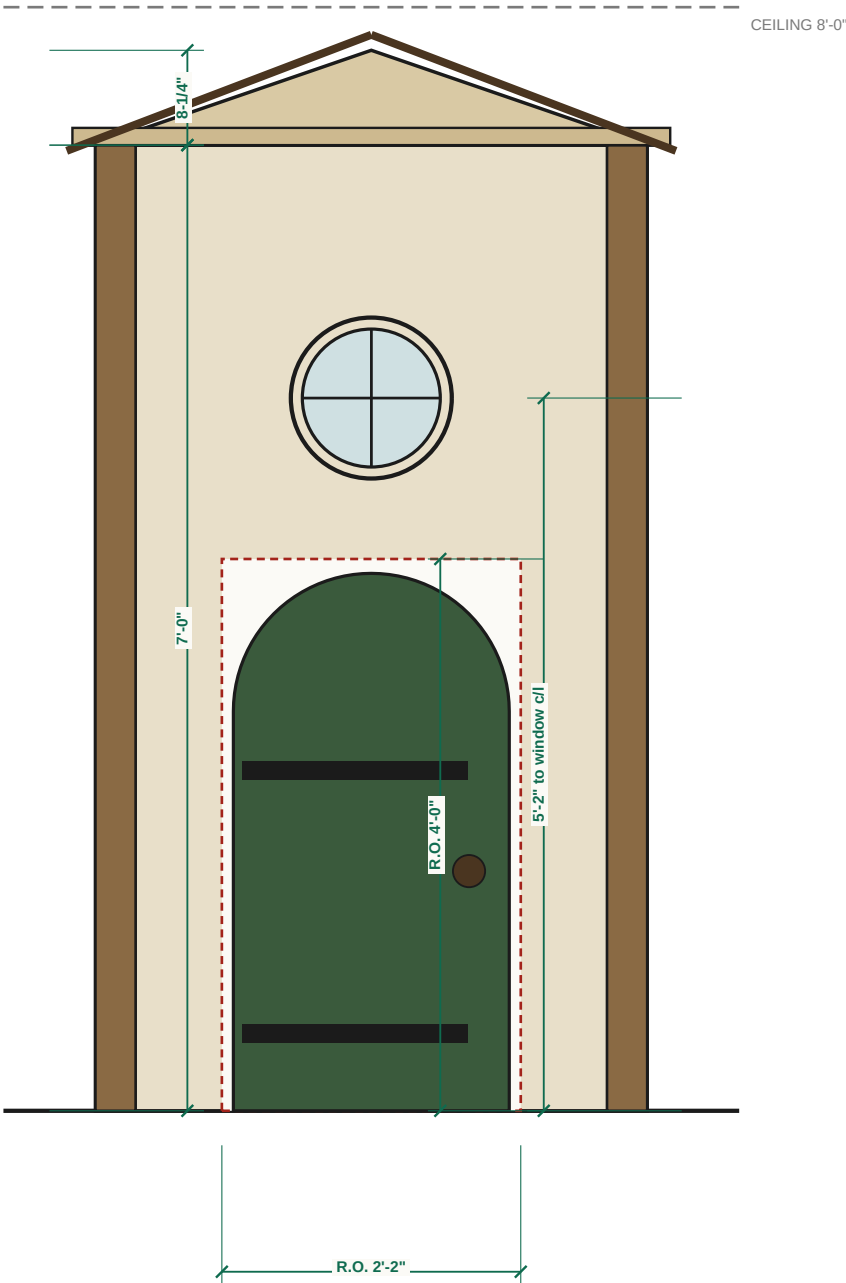

ROOF FRAMING PLAN

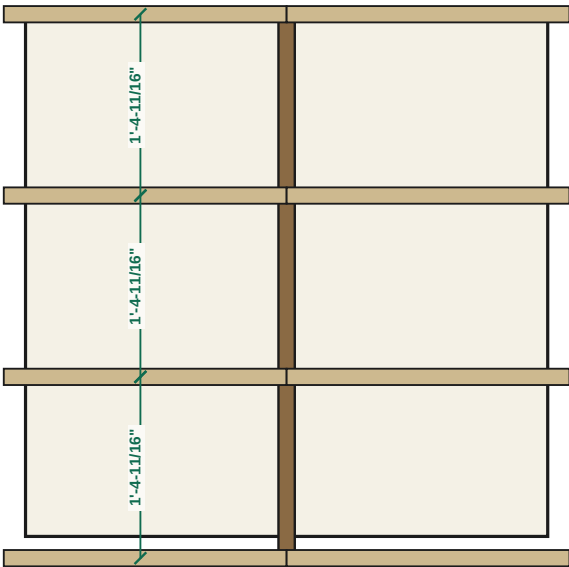

8 rafters 2x4 · 3.38:12 pitch · ridge 2x6

## PLAYHOUSE NOTES

### WALLS STOP AT 84", NOT 96".

A 96"-tall box under a 96" ceiling has no room for a roof. Dropping the wall to 84" buys a real 10-1/2" peaked roof that reads from across the room, and still leaves 84" of interior headroom.


- NW and SE posts lag directly to wall studs: 3x 3/8" x 4" lag + washer each, staggered.
- SW post is free-standing — anchor with a Simpson ABU44Z post base lagged to the subfloor.
- WM post creates the 18" bridge bay and matches the loft gate width. Do not omit it.
- Rope-wrap the SW post full height: 1/2" poly rope, spiral-wound, hot-glued every 6".
- Rough-saw look: run a wire wheel over the 4x4s, then a coat of dark walnut stain wiped back.
- Interior: battery LED lantern on a hook, no wiring.
- Leave the west wall below the bridge bay open or slatted so the space does not feel like a closet.

# ROPE BRIDGE

elevation · anchor detail · span correction · safety

A7

## BRIDGE ELEVATION — looking north

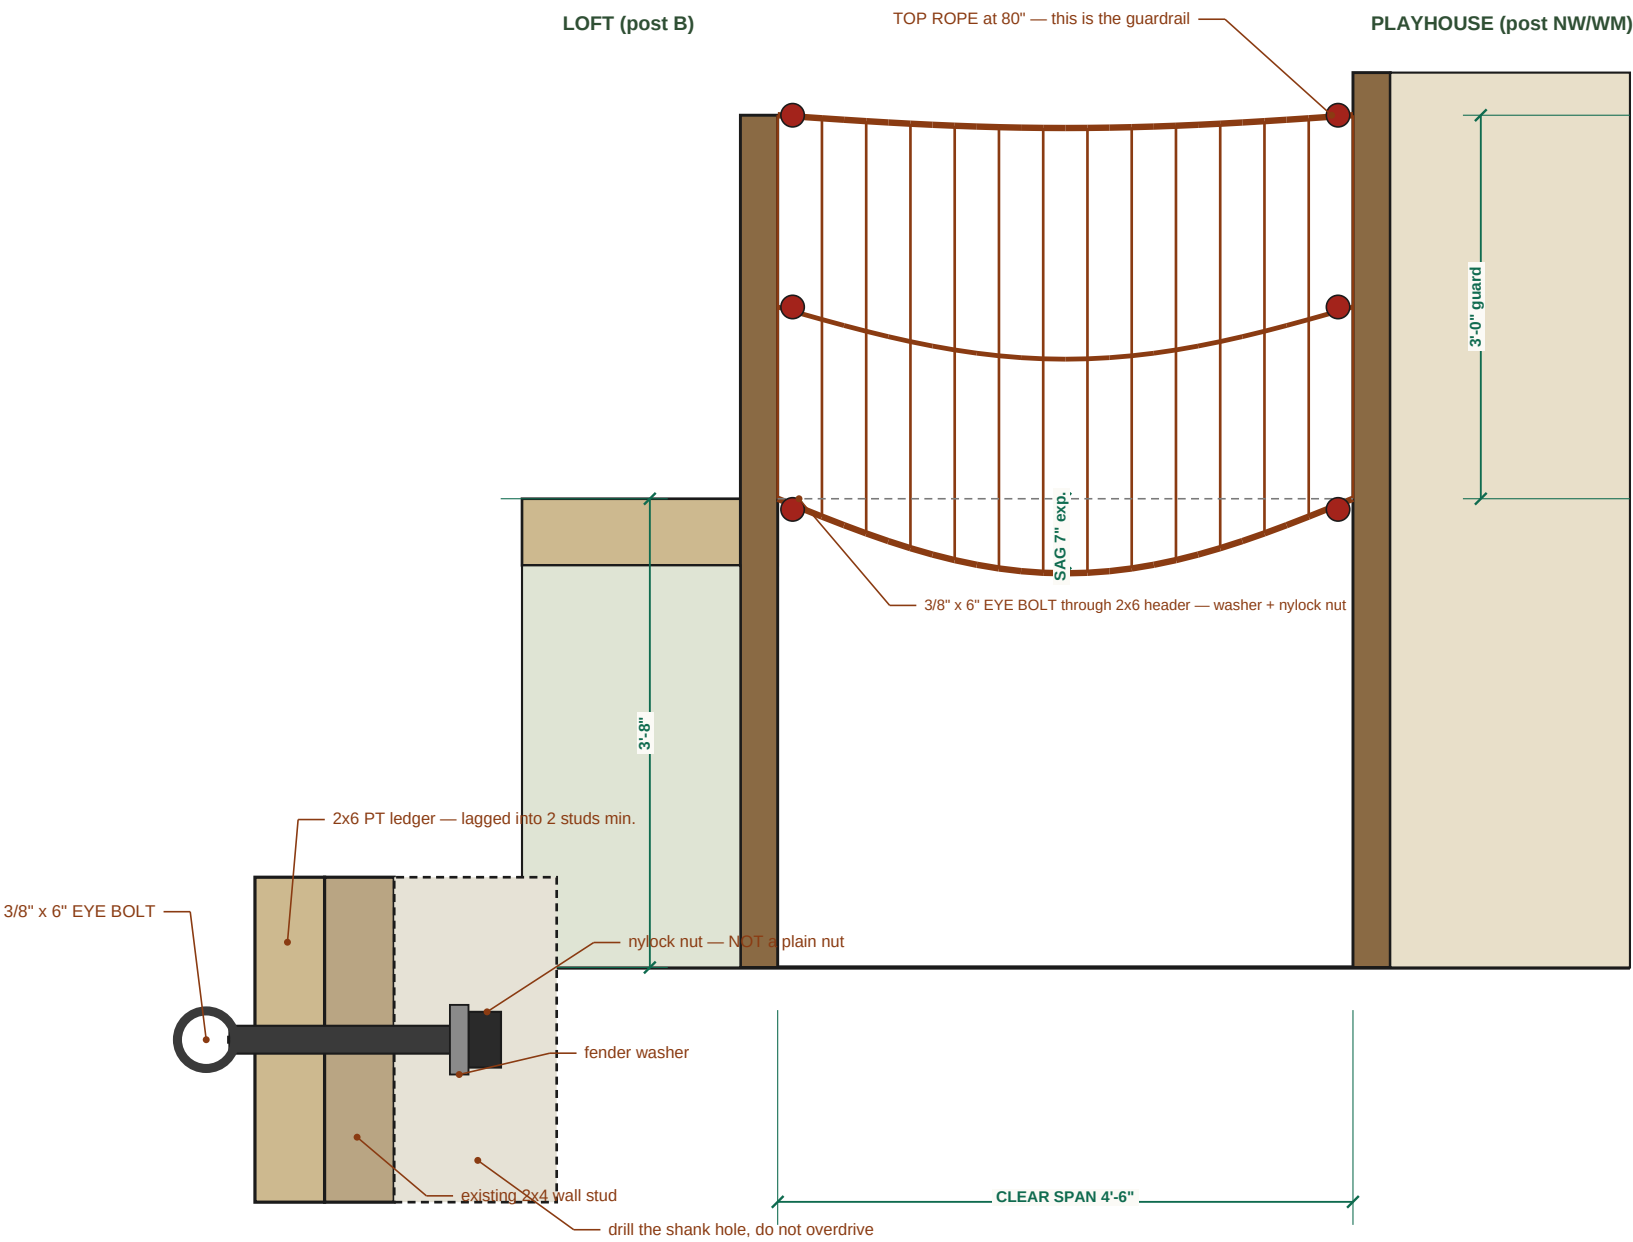

## BRIDGE ANCHOR — enlarged detail

same detail at both ends and at every rope railing anchor

## SPAN CORRECTION

The brief says ~42". The room says 4'-6".

13'-6" wall - 5'-0" loft - 4'-0" playhouse  
= 4'-6" clear.

Both structures are in corners, so neither can slide toward the other. Order the net for 54", not 42".

## SAFETY — READ THIS BEFORE ORDERING ROPE

- A single top rope 36" above a sagging net is NOT a guard. Order a net with full-height SIDE PANELS, or add the mid rope at 18" shown above. Both is better. A kid will lean on whatever is there.
- Commercial cargo net, 1/2" poly or nylon rope, 4"-6" mesh, playground rated. Not hardware-store rope tied by hand. Not climbing rope.
- Eye BOLTS, 3/8" x 6", through-bolted with a fender washer and a nylock nut on the back side. Screw eyes pull out of wood under cyclic load.
- Both ledgers lag into a MINIMUM of 2 studs each, 3/8" x 4" lag screws, 2 per stud.
- Fall zone: the bridge is 44" up. Put 2" interlocking foam or a 1" gym mat on the floor under the full span and 24" past each end. This is not optional.
- Rated for ONE child at a time. Post a sign. Kids will ignore it; the hardware should not.
- Re-torque every eye bolt and lag after 30 days, then every 6 months. Write the date on the ledger.

# CUT LIST

every member, every finished length

A8

## CUT LIST — generated directly from the model. Every length is the finished cut length.

Lengths are long-point to long-point where a member is mitered. Cut one of any repeated part, test-fit it, then batch the rest.

### LOFT / POSTS

| STOCK  | LENGTH    | QTY | NOTE             |
|--------|-----------|-----|------------------|
| 4x4 PT | 3'-1-3/4" | 1   | room-corner stub |
| 4x4 PT | 6'-8"     | 1   | bridge post      |
| 4x4 PT | 6'-8"     | 3   |                  |
| 4x4 PT | 6'-8"     | 1   | ladder post      |

### LOFT / LEDGERS

| STOCK  | LENGTH     | QTY | NOTE                                        |
|--------|------------|-----|---------------------------------------------|
| 2x6 PT | 5'-0"      | 1   | lag to studs @16 O.C., 3/8 x 4 lag + washer |
| 2x6 PT | 4'-10-1/2" | 1   | lag to studs @16 O.C.                       |

### LOFT / RIM

| STOCK | LENGTH    | QTY | NOTE                        |
|-------|-----------|-----|-----------------------------|
| 2x6   | 1'-8"     | 2   | outside face length 20.000" |
| 2x6   | 2'-6-5/8" | 2   | outside face length 30.615" |

### LOFT / JOISTS

| STOCK | LENGTH    | QTY | NOTE                                    |
|-------|-----------|-----|-----------------------------------------|
| 2x6   | 4'-9"     | 1   | LUS26 hanger both ends                  |
| 2x6   | 4'-4"     | 1   | skew-cut; Simpson LSU26 skewable hanger |
| 2x6   | 3'-9-3/8" | 1   | skew-cut; Simpson LSU26 skewable hanger |
| 2x6   | 1'-5"     | 1   | decking support at 135-deg corner       |

### LOFT / KNEE WALL

| STOCK  | LENGTH     | QTY | NOTE                |
|--------|------------|-----|---------------------|
| 2x4 PT | 1'-8"      | 2   | 20.00" face length  |
| 2x4    | 1'-8"      | 2   | 20.00" face length  |
| 2x4    | 2'-10-3/4" | 8   | 34.75" - NOT 40-42" |
| 2x4 PT | 2'-6-5/8"  | 2   | 30.61" face length  |
| 2x4    | 2'-6-5/8"  | 2   | 30.61" face length  |

### LOFT / HOBBIT DOOR

| STOCK | LENGTH     | QTY | NOTE                                |
|-------|------------|-----|-------------------------------------|
| 2x4   | 2'-8"      | 2   | 32.00" jack                         |
| 2x4   | 2'-10-3/4" | 2   | 34.75" king                         |
| 2x4   | 2'-9"      | 1   | flat - deck load bypasses this wall |
| 2x4   | 2-3/4"     | 3   | 2.75"                               |

### LADDER

| STOCK | LENGTH     | QTY | NOTE                                                 |
|-------|------------|-----|------------------------------------------------------|
| 2x4   | 4'-0-9/16" | 2   | 48.55" o/a, 65 deg, both ends cut 25 deg             |
| 2x4   | 1'-3"      | 4   | riser 8.80", dado 3/4" into stringers + 2 screws/end |

### LOFT / BOOKSHELF

| STOCK    | LENGTH    | QTY | NOTE                                      |
|----------|-----------|-----|-------------------------------------------|
| 3/4" ply | 2'-1-3/8" | 4   | 25.39" x 7.25" - 1/4" roundover all edges |
| 3/4" ply | 3'-0"     | 2   | lag to post w/ 2x 1/4 x 3 lag             |
| 1x3      | 2'-1-3/8" | 3   | 2" book lip, rounded                      |

### PLAYHOUSE / POSTS

| STOCK  | LENGTH | QTY | NOTE                |
|--------|--------|-----|---------------------|
| 4x4 PT | 7'-0"  | 1   | exposed room corner |
| 4x4 PT | 7'-0"  | 1   | bridge bay post     |
| 4x4 PT | 7'-0"  | 1   | lag to N wall studs |
| 4x4 PT | 7'-0"  | 1   | lag to E wall studs |

### PLAYHOUSE / PLATES

| STOCK | LENGTH | QTY | NOTE                                  |
|-------|--------|-----|---------------------------------------|
| 2x4   | 4'-0"  | 4   | top plate @ 84" - anchors roof + trim |

### PLAYHOUSE / ROOF

| STOCK | LENGTH | QTY | NOTE                               |
|-------|--------|-----|------------------------------------|
| 2x6   | 4'-2"  | 1   | 1x6 or 2x6 ridge, 1" below ceiling |
| 2x4   | 2'-3"  | 8   | 3.38:12 pitch, 2" overhang         |

### PLAYHOUSE / DOOR

| STOCK | LENGTH | QTY | NOTE                            |
|-------|--------|-----|---------------------------------|
| 2x4   | 4'-0"  | 2   | 48" jack                        |
| 2x4   | 7'-0"  | 2   | 84" king                        |
| 2x6   | 2'-9"  | 1   | double 2x6 header over 26" R.O. |

### BRIDGE / LEDGERS

| STOCK  | LENGTH    | QTY | NOTE                                                 |
|--------|-----------|-----|------------------------------------------------------|
| 2x6 PT | 1'-7-1/2" | 2   | lag 3/8 x 4 into 2 studs min; eye bolts THROUGH-bolt |
| 2x6    | 1'-6"     | 2   | net anchor header, 4x 3/8 eye bolts                  |
| 2x4    | 1'-6"     | 2   | top rope anchor, 2x 3/8 eye bolts                    |

## SHEET GOODS + WHAT TO ACTUALLY BUY

| ITEM                             | NET                 | BUY   |
|----------------------------------|---------------------|-------|
| 4x4 x 8 ft PT post               | 64.5 lf             | 8     |
| 4x4 x 10 ft PT post              | (1 post + the stub) | 1     |
| 2x6 x 8 ft Ground Contact PT     | 13.1 lf             | 3     |
| 2x6 x 8 ft SPF                   | 32.6 lf             | 5     |
| 2x4 x 8 ft Ground Contact PT     | 8.4 lf              | 2     |
| 2x4 x 8 ft SPF stud              | 118.3 lf            | 18    |
| 1x3 x 8 ft pine (book lips)      | 6.3 lf              | 1     |
| 3/4" 4x8 ply — deck + shelf      | 21.75 sq ft + shelf | 2     |
| 3/4" 4x8 ext ply — skins + doors | ~46 sq ft           | 2     |
| 1x4 T&G pine — door faces        | ~24 lf              | 1 bdl |

2x quantities include 15% waste. Every cut in this set fits an 8 ft stick.  
The one 10 ft 4x4 yields an 80" post AND the 37-3/4" corner stub with almost no waste. Nine 8-footers would leave you one post short.

HARDWARE + HOME DEPOT BUY LIST

internet numbers · quantities · budget

A9

HARDWARE SCHEDULE + HOME DEPOT BUY LIST

Internet # verified against homedepot.com. Prices are US national ranges and move weekly — treat them as a budget, not a quote. Items without an Internet # are commodity stock carried in every store; grab them off the shelf.

| ITEM                                                            | INTERNET # | QTY  | EST. EACH      | WHAT IT DOES / WHY THIS ONE                            |
|-----------------------------------------------------------------|------------|------|----------------|--------------------------------------------------------|
| LUMBER                                                          |            |      |                |                                                        |
| 4 in. x 4 in. x 8 ft. #1 Pressure-Treated Post                  | 202812131  | 8    | \$12 - \$16    | four loft posts at 80" + four playhouse posts at 84"   |
| 4 in. x 4 in. x 10 ft. #1 Pressure-Treated Post                 | —          | 1    | \$16 - \$22    | yields the fifth 80" post AND the 37-3/4" corner stub  |
| 2 in. x 6 in. x 8 ft. Ground Contact PT                         | —          | 3    | \$9 - \$13     | ledgers: loft N + W, bridge both sides                 |
| 2 in. x 6 in. x 8 ft. Prime Kiln-Dried SPF                      | —          | 6    | \$7 - \$10     | joists, rim, playhouse header, ridge                   |
| 2 in. x 4 in. x 8 ft. Ground Contact PT                         | —          | 2    | \$6 - \$9      | knee wall bottom plates (on subfloor)                  |
| 2 in. x 4 in. x 8 ft. Prime Kiln-Dried Stud                     | —          | 18   | \$4 - \$6      | studs, plates, rafters, ladder, door framing           |
| 1 in. x 3 in. x 8 ft. Pine Board                                | —          | 1    | \$6 - \$9      | shelf book lips                                        |
| 3/4 in. 4x8 Sanded Plywood (BC or Sande)                        | —          | 4    | \$48 - \$68    | 2 structural, 2 skin + doors                           |
| 1 in. x 4 in. Tongue & Groove Pine (bundle)                     | —          | 1    | \$28 - \$40    | door faces, both doors                                 |
| STRUCTURAL HARDWARE                                             |            |      |                |                                                        |
| Simpson Strong-Tie LUS26 Face-Mount Joist Hanger                | 100374889  | 8    | \$1.77 ea      | square joist-to-ledger connections                     |
| Simpson Strong-Tie LSU26 Adjustable Skewable U Hanger           | 100375129  | 6    | \$4 - \$6 ea   | J2/J3 into the angled rims — THE part for this         |
| Simpson Strong-Tie ABU44Z Adjustable Standoff Post Base         | 100375358  | 4    | \$14 - \$19 ea | free-standing posts: loft D, playhouse SW, ladder foot |
| Simpson Strong-Tie A23 / A35 Framing Angle                      | —          | 16   | \$0.80 ea      | post-to-rim and plate ties                             |
| Everbilt 3/8 in. x 4 in. Hex Lag Screw (bulk)                   | —          | 60   | \$0.55 ea      | ledgers into studs, posts into studs                   |
| Everbilt 3/8 in. Flat Washer (bulk)                             | —          | 100  | \$0.15 ea      | every lag and every bolt, both sides                   |
| Everbilt 3/8 in. x 6 in. Zinc-Plated Eye Bolt w/ Nut            | 806746     | 12   | \$1.11 ea      | bridge + rope railing anchors — BOLTS not screw eyes   |
| Everbilt 3/8 in. Nylon Insert Lock Nut (nylock)                 | —          | 16   | \$0.35 ea      | back side of every eye bolt                            |
| Everbilt 1/4 in. x 3 in. Hex Lag Screw                          | —          | 40   | \$0.40 ea      | bookshelf to posts, hinges, trim                       |
| #9 x 3 in. Star Drive Construction Screw, 5 lb box              | —          | 1    | \$34 - \$44    | general framing                                        |
| #8 x 1-5/8 in. Construction Screw, 1 lb box                     | —          | 2    | \$9 - \$12     | decking + skins — SCREWED, never nailed                |
| ROPE, NET, PLAY HARDWARE                                        |            |      |                |                                                        |
| VEVOR Climbing Cargo Net 6.6 x 10.5 ft Double-Layer Rope Bridge | 320569708  | 1    | \$70 - \$110   | cut/fold to 54 x 18 — double layer gives side panels   |
| VEVOR Playground Climbing Cargo Net 8 x 4 ft                    | 320580952  | 1    | \$45 - \$70    | ALTERNATE if you want the smaller single panel         |
| Everbilt 1/2 in. x 50 ft. Twisted Poly Rope (manila look)       | —          | 2    | \$22 - \$32    | guard ropes, ladder handrails, post wrap               |
| Everbilt 1/2 in. Rope Thimble + Wire Rope Clip set              | —          | 16   | \$2 - \$4 ea   | every rope termination — no knots at anchors           |
| Everbilt 3/8 in. Quick Link / Screw-Pin Shackle                 | —          | 8    | \$3 - \$5 ea   | net to eye bolt, serviceable                           |
| DOORS, FINISH, LIGHT                                            |            |      |                |                                                        |
| NUVO IRON 12 in. Black Steel Strap Hinges Kit (2-pack)          | 320202663  | 2    | \$18 - \$26    | one 2-pack per door                                    |
| 2-3/4 in. Round Wood Cabinet Knob                               | —          | 2    | \$4 - \$7      | hobbit door knobs                                      |
| Everbilt Magnetic Push Catch                                    | —          | 2    | \$4 - \$6      | NO latch, NO lock — kid must push out from inside      |
| 8 in. Clear Acrylic Circle / Plexiglass sheet to cut            | —          | 1    | \$12 - \$22    | porthole — acrylic only, never glass                   |
| 12 in. Clear Acrylic Circle                                     | —          | 1    | \$16 - \$28    | playhouse round window                                 |
| Commercial Electric LED Puck Light, battery, 3-pack             | —          | 2    | \$18 - \$26    | 2 inside the loft base, 1 in the playhouse             |
| BEHR Premium Plus Interior Eggshell — deep green                | —          | 1 qt | \$20 - \$26    | match "Dark Everglade" / "Pine Mountain"               |
| Varathane Dark Walnut Wood Stain, qt                            | —          | 1    | \$14 - \$19    | rough-sawn look on 4x4s and trim                       |
| Minwax Polycrylic Clear Satin, qt                               | —          | 1    | \$20 - \$26    | water-based topcoat — low odor for a kid room          |
| Zero-VOC primer, qt                                             | —          | 1    | \$16 - \$22    | everything a kid touches                               |
| FALL PROTECTION — NOT OPTIONAL                                  |            |      |                |                                                        |
| 3/4 in. Interlocking Foam Mat Tiles, 24x24, 6-pack              | —          | 3    | \$26 - \$38    | floor under the bridge and both entries                |

BUDGET: \$1,050 - \$1,350 in materials. Add ~\$120 if you buy the double-layer net instead of the single panel.

KIDS' PLAYROOM BUILD: LOFT / BRIDGE / PLAYHOUSE

THE ONE SPEC THE BRIEF GOT WRONG ABOUT SOURCING

SCALE: n.t.s.

DATE: 2026-09-19

UNITS: INCHES

GENERATED FROM THE PARAMETRIC MODEL — params.py / geometry.py / Blender 4.2

NOT ENGINEER-STAMPED · VERIFY STUDS ON SITE · SEE A0


The brief says "Home Depot only, no specialty suppliers" AND "commercial playground-rated net, not hardware-store rope."

Those pull against each other. Home Depot does carry real polyester cargo netting (VEVOR, SVOPES, Swing-N-Slide) rated 500 lb — that satisfies both. What it does NOT carry is certified playground equipment to ASTM F1487. If you want a certified net, that is a specialty order and the only line item in this build that leaves Home Depot. Your call; the framing does not change.

MODEL VIEWS — the geometry, not a mood board. Photoreal 2K versions of all four exist in Higgsfield: exports/higgsfield/MANIFEST.md



01 Isometric overview — both structures and the crossing

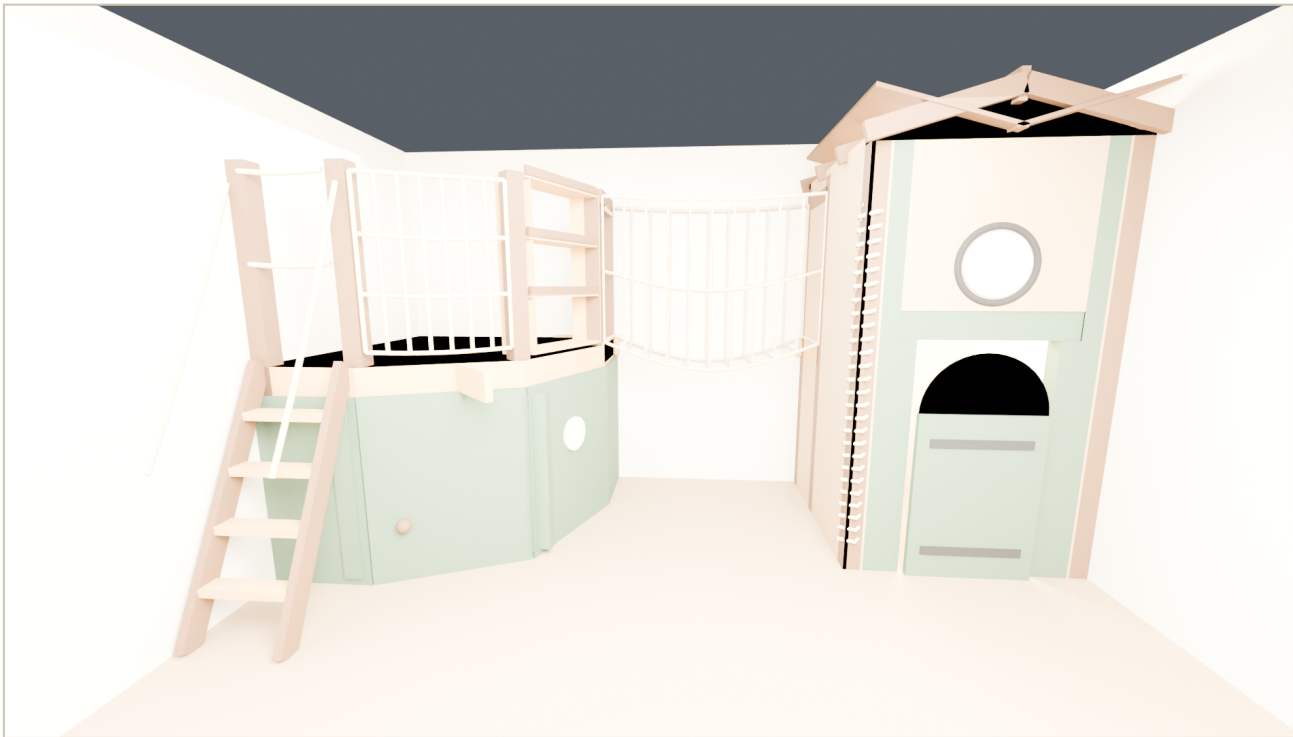

02 From the room doorway — what a kid sees walking in




03 Loft three-quarter — hex deck, rope guard, bookshelf




04 Playhouse front — hobbit door, round window, peaked roof


ORTHOGRAPHIC + FRAMING-ONLY VIEWS

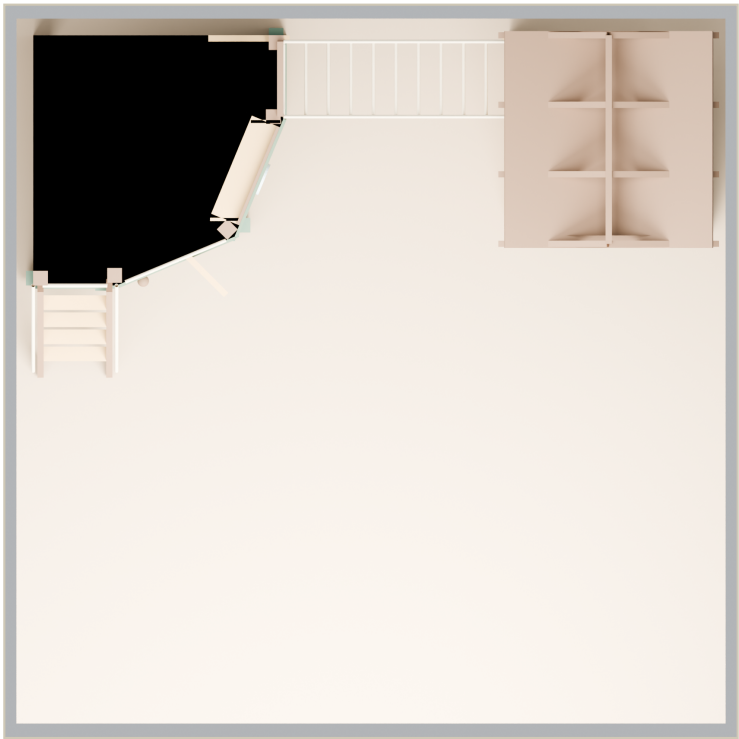


T1 True plan — walls and ceiling removed, floor retained

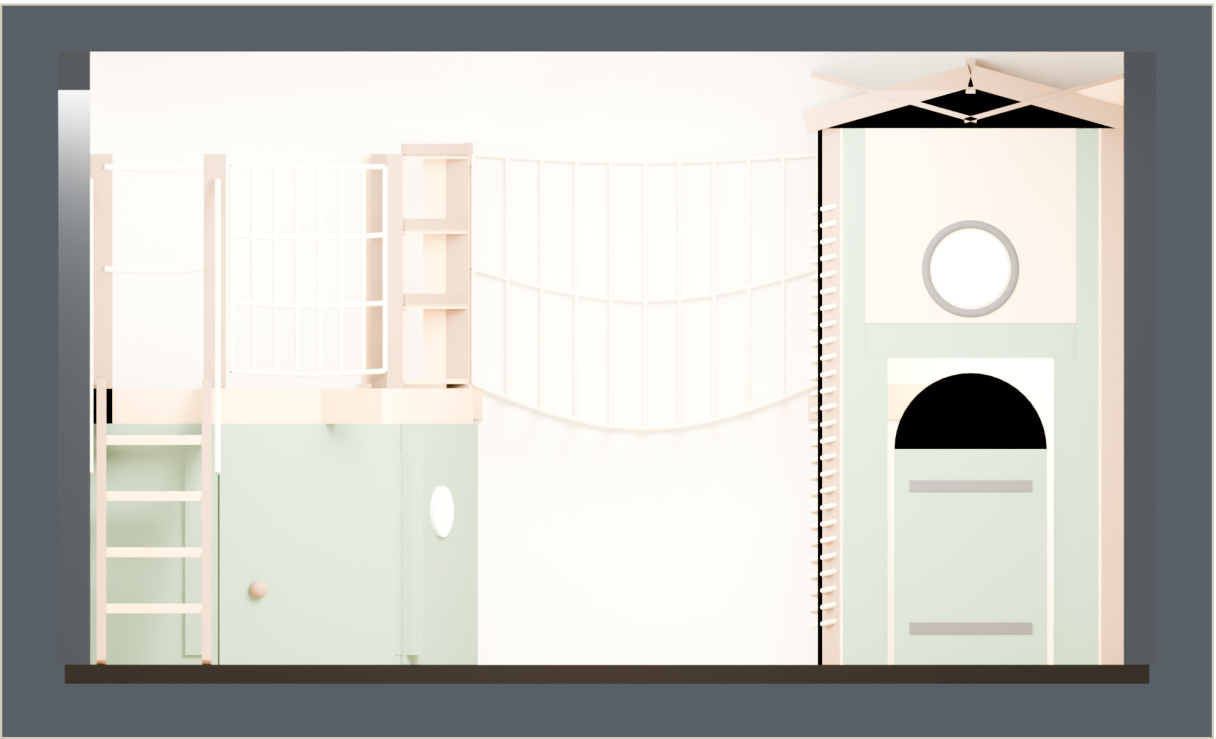

T2 North elevation — the wall both structures anchor to

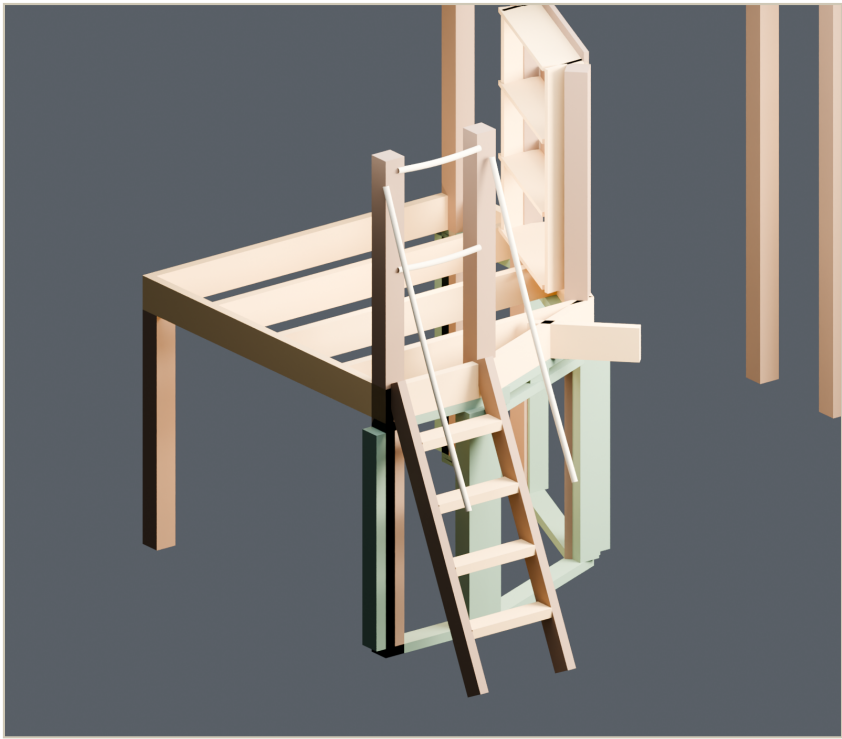

T3 Loft framing only — skins, decking and all rope hidden

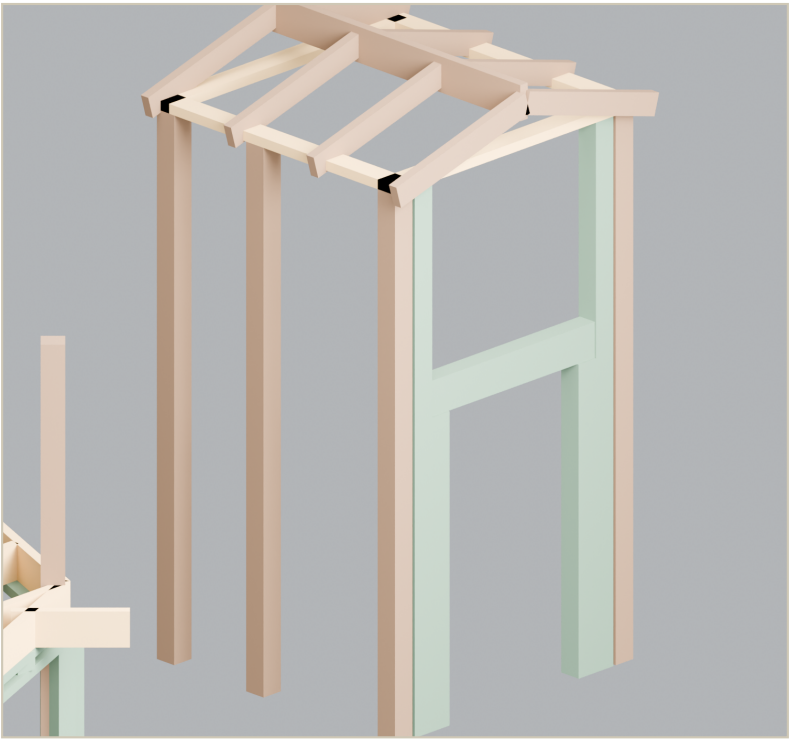

T4 Playhouse framing only — posts, plates, rafters, door bucks